




# Peak Demand Automation

## Data Translator/ Protocol Converter


### Turn any serial device into wireless Modbus

Simple and easy to use, no mesh configuration

Four times the coverage of Zigbee® without Wi-Fi interference!

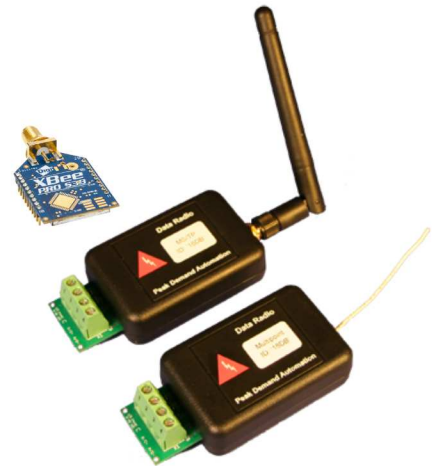

External and internal models available

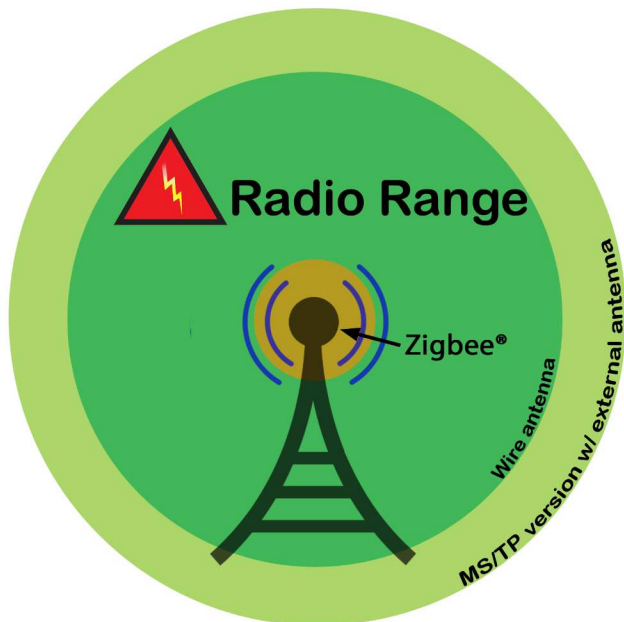

*HVAC compatible:  
24VAC or DC powered*

- 900 MHz band for best range 1000 ft indoors
- 4 times the distance (16 times the area) of Zigbee® radios!
- Spread spectrum security and reliability
- 16 non-overlapping channels
- Built in wire antenna
- Baud rates from 1200 to 115.2 kbaud
- Low power consumption